


Fully Automatic Carton Sealer with both Flap Folding and top and Bottom Closure

T-400/402
For Uniform
Cartons




High quality tape dispensers

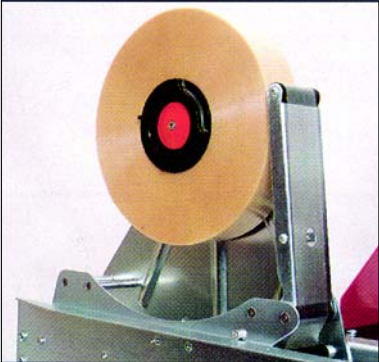

Automatic flap folding




Efficient controller for carton infeed

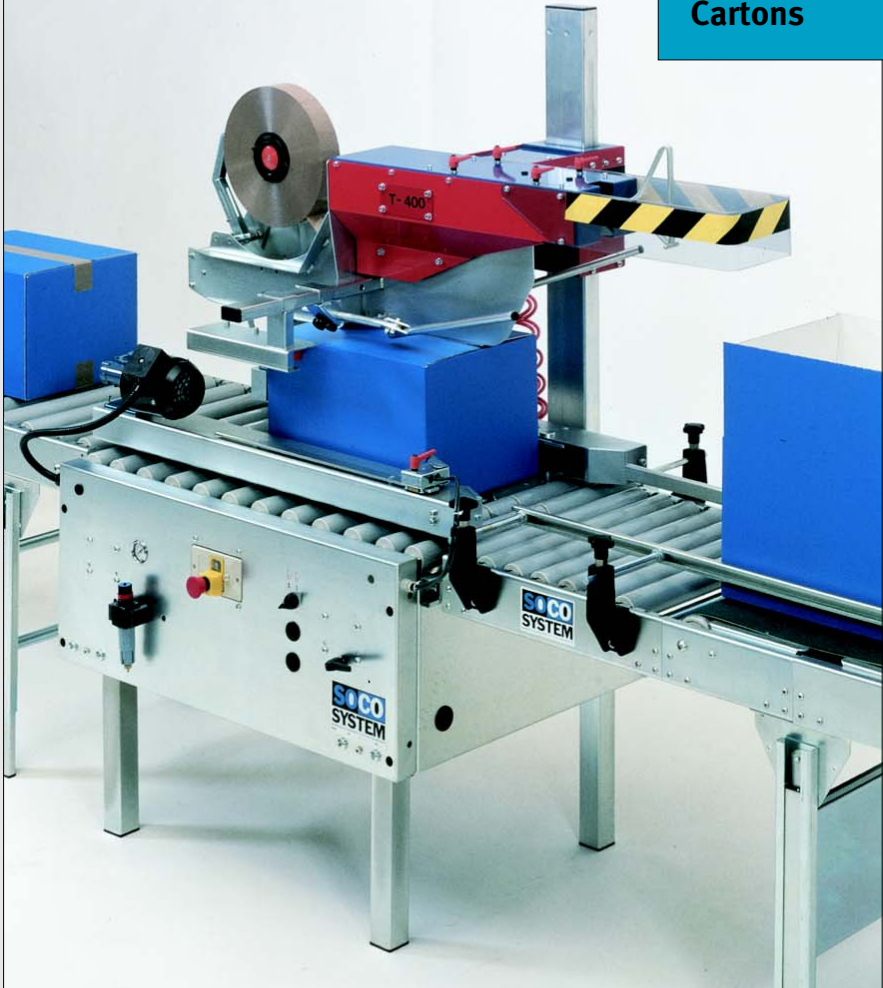

T-402 ->

Carton sealer for the closure of uniform carton sizes in batches. easy and quick manual adjustment for carton size.

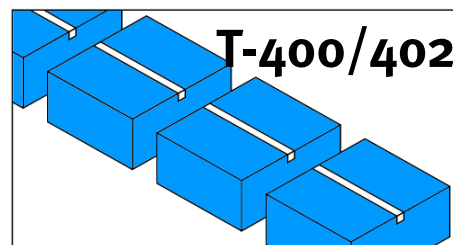

“EFFICIENT PACKAGING”

Basic Models

The standard version is available in three constructions: T-400/T402 and T-402 maxi (See table). All three machines can be fitted with extra high pillars.

Unbeatable Efficiency

All models are constructed for “round the clock” applications and require very little service.

High Quality Tape Dispensers

The thumbscrew of the tape roller hub makes tape replacement easy and, at the same time, ensures tape roller stability during the sealing process.

Three dispenser types can be used for the carton sealers in the T-400 series:

- 30 mm dispenser for tape ranging in width from 25-30 mm . The tape overlap is 50 mm.
- 50 mm dispenser for tape ranging in

width from 38-50 mm. The tape overlap is either 50 mm or 70 mm.

- 100 mm dispenser for tape ranging in width from 50-75 mm. The tape overlap is 70 mm.



All of SOCO SYSTEM’s dispensers are fitted with an adjustable hub brake, adjustable tape roller hub, double roller units, knife guards etc.

All the dispensers can be fitted with a monitoring system to supervise the sealing process.

The monitoring system supervises the tape roller and the knife by means of photo electric eyes. The alarm generates an audio and visual warning and, if required, it can stop the machine at the same time.

Alarm is given in the following cases:

1. No tape is applied
2. Tape breaks during sealing
3. Tape not cut and carton continues to pull tape off the dispenser
4. Tape roller empty. (Accessory equipment)

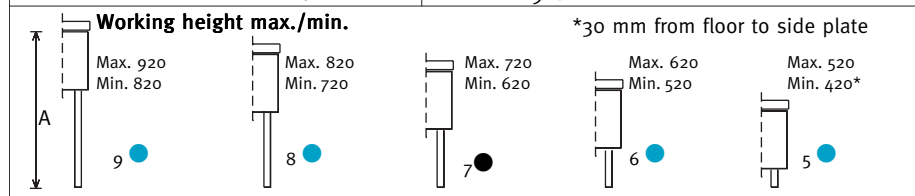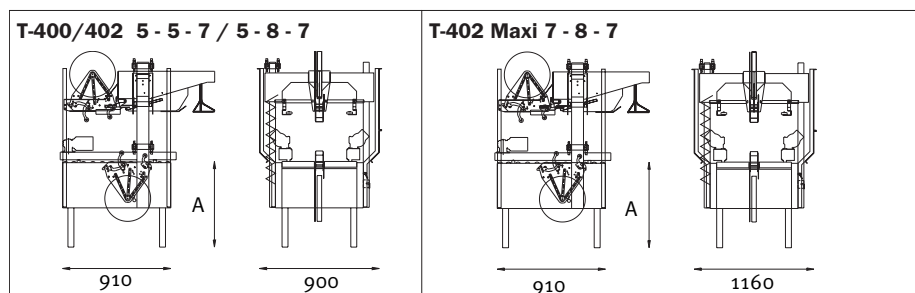

Data	Carton Dimensions*			Tape overlap	Dispenser width			Capacity*	Side drives				Shipping carton dimensions			Weight KG.
	Length	Width	Height		25-30	38-50	50-75		50	80	+200/400	+200/400	Length	Width	Height	
T-400 5-5-7	Max. 550 Min. 200	460 120	470 95	● ●	● ●	● ●	Max. 18/min.	● ● ● ●	1440	950	1440	175				
T-400 5-8-7	Max. 550 Min. 200	460 120	770 95	● ●	● ●	● ●	Max. 18/min.	● ● ● ●	1440	950	1440	175				
T-402 5-5-7	Max. 750 Min. 200	460 120	470 95	● ●	● ●	● ●	Max. 18/min.	● ● ● ●	1440	950	1440	175				
T-402 5-8-7	Max. 750 Min. 200	460 120	770 95	● ●	● ●	● ●	Max. 18/min.	● ● ● ●	1440	950	1440	175				
T-402 maxi 7-8-7	Max. 750 Min. 200	710 170	625 125	● ●	● ●	● ●	Max. 18/min.	● ● ● ●	1850	1250	1800	220				
General	Electrical equipment: 3x230/400 V 50-60 Hz or 3x415/460 V 50-60 Hz Connected load 0,3 Kw Other specifications available on demand.			Taperoller dimensions: Max. 385			Max. 0.6 l at 6 bar per carton									

- Standard
- Optional

All measurements are in mm.
Right to alter specifications reserved.

* Depending on the quality, construction and size of the box.

SOCO SYSTEM A/S

Helgeshøj Allé 16 D . DK-2630 Taastrup
Tel. +45 43 52 55 66 Fax +45 43 52 81 16
info@socosystem.com
www.socosystem.com